



TEST REPORT: IRM-03-15

3W Single Output Encapsulated Type

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test



■ RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST
OUTPUT FUNCTION TEST



NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 14.85V ~ 15.15V	I/P: 230VAC O/P: MIN LOAD TA: 25°C	CH1: 14.93V ~ 14.93V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1: 2.5% ~ -2.5%	I/P: 100VAC / 305VAC O/P: FULL / MINLOAD TA: 25°C	V1: -0.47% ~ -0.53%
3	LINE REGULATION (MAX.)	V1: 0.5% ~ -0.5%	I/P: 100VAC / 305VAC O/P: FULL LOAD TA: 25°C	V1: 0.00% ~ -0.07%
4	LOAD REGULATION (MAX.)	V1: 0.5% ~ -0.5%	I/P: 230VAC O/P: MIN LOAD ~ FULL LOAD TA: 25°C	V1: 0.00% ~ -0.07%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P: FULL LOAD TA: 25°C	TEST < 2.013 %
6	RIPPLE & NOISE(Max)	V1: 200 mVp-p	I/P: 230VAC O/P: FULL LOAD TA: 25°C	V1: 72.8 mVp-p
7	SET UP TIME (MAX.)	230VAC : 600ms	I/P: 230VAC	230VAC : 20ms
		115VAC : 600ms	I/P: 115VAC	115VAC : 18ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	

8

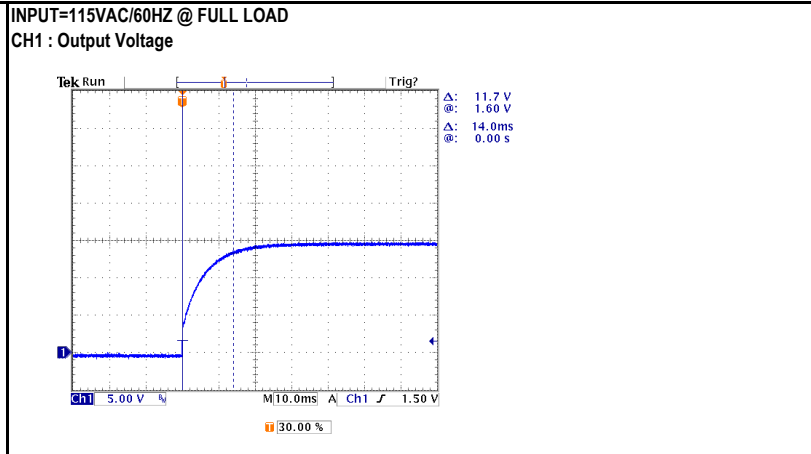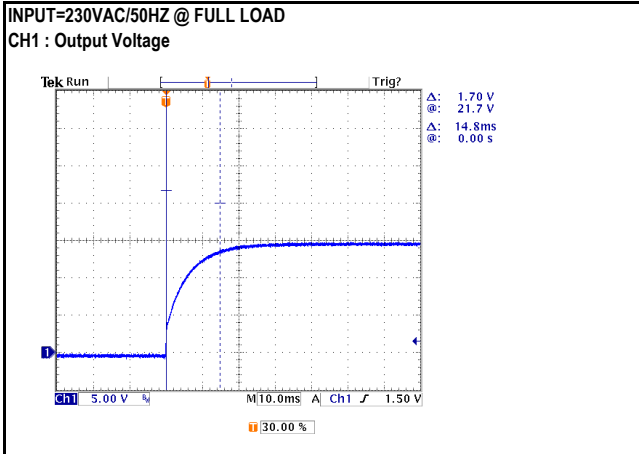



HOLD UP TIME (TYP.)	230VAC	: 40ms	I/P:	230VAC	230VAC	: 73.6ms
	115VAC	: 8ms	I/P:	115VAC	115VAC	: 16.8ms
			O/P:	FULL LOAD		
			TA:	25°C		

9

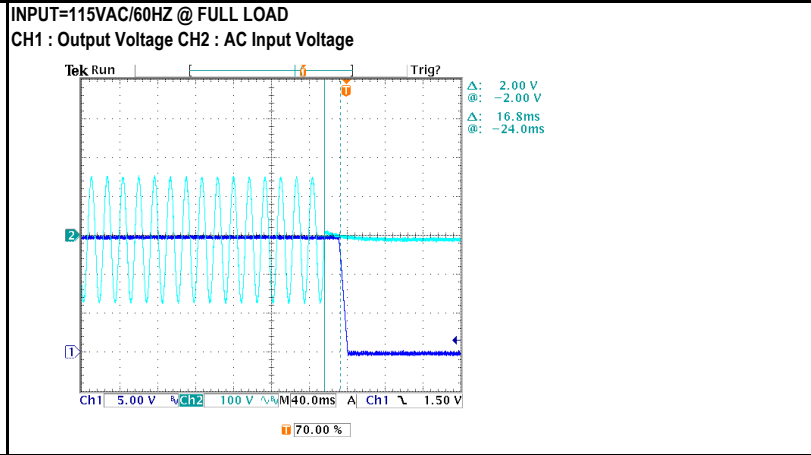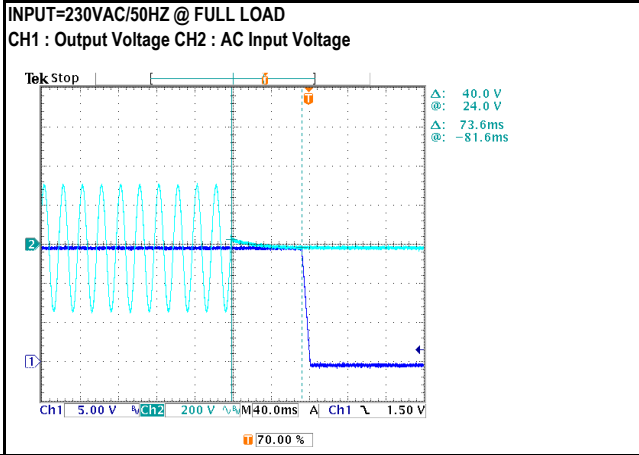

DYNAMIC LOAD	V1:	1500	mVp-p	I/P:	230VAC	(1).	(2).	unit:mVp-p
				O/P:	(1)Full/Min load 50%duty/120HZ (2)Full/Min load 50%duty/1KHZ	V1:	180.0mv	186.0mv
				TA:	25°C			


10

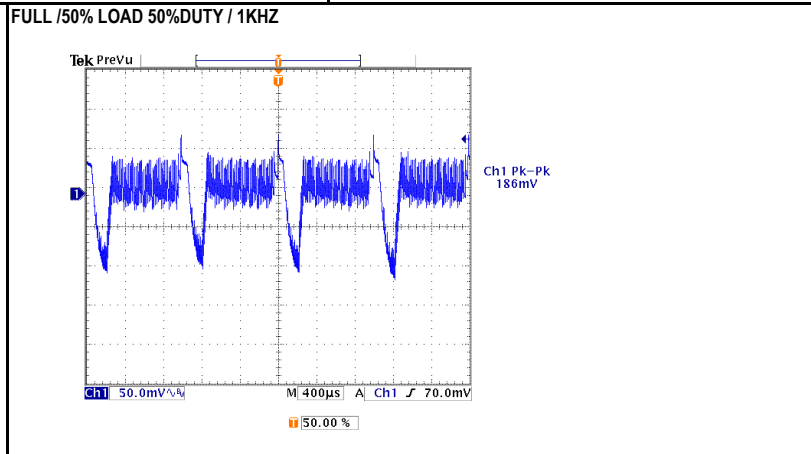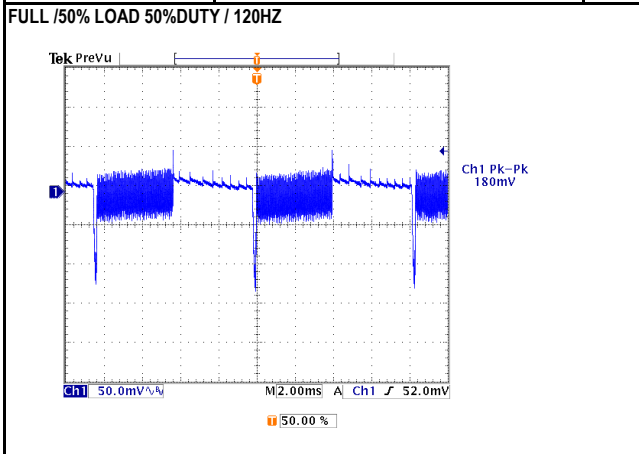





INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC ~ 305VAC 120VDC ~ 430VDC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	56.0VAC ~ 305VAC 79.2VDC ~ 430VDC
			I/P: LOW-LINE = 77VAC HIGH-LINE = 300VAC O/P: FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P: 100VAC ~ 305VAC O/P: FULL-MIN LOAD Ta: 25°C	TEST: OK
3	INPUT CURRENT (TYP.)	0.04A / 230VAC 0.07A / 115VAC 0.035A / 277VAC	I/P: 230VAC I/P: 115VAC I/P: 277VAC O/P: FULL LOAD TA : 25°C	I= 0.03A / 230VAC I= 0.05A / 115VAC I= 0.0249A / 277VAC
4	LEAKAGE CURRENT	< 0.25mA	I/P: 277VAC O/P: MIN LOAD TA : 25°C	L-FG: 0.0721 mA N-FG: 0.0722 mA
5	NO LOAD POWER CONSUMPTION	< 0.075W	I/P: 230VAC O/P: MIN LOAD TA : 25°C	< 0.038 W
	EFFICIENCY (TYP.)	78.0%	I/P: 230VAC O/P: FULL LOAD TA : 25°C	81.2 %

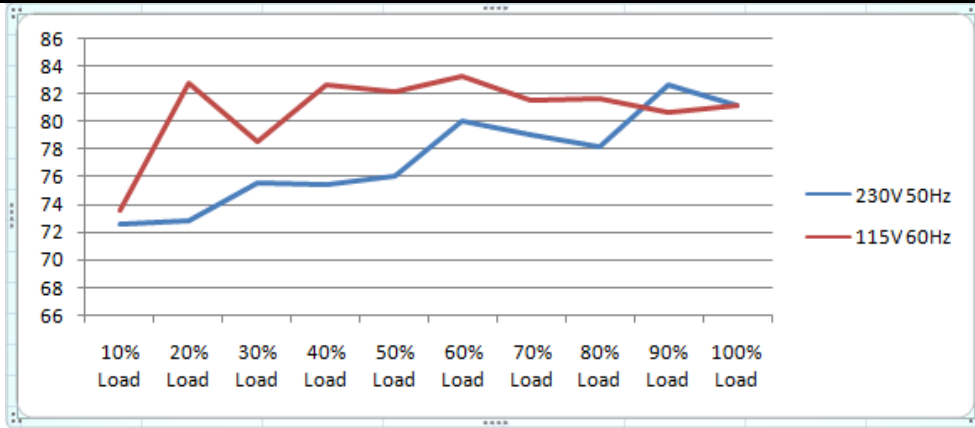

7	INRUSH CURRENT (TYP.)	20A / 230VAC 10A / 115VAC twidth= 0 us measured at 50% Ipeak COLD START	I/P: 230VAC I/P: 115VAC O/P: FULL LOAD TA : 25°C	I= 5.72A / 230VAC I= 2.62A / 115VAC
		INPUT=230VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage	INPUT=115VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage	

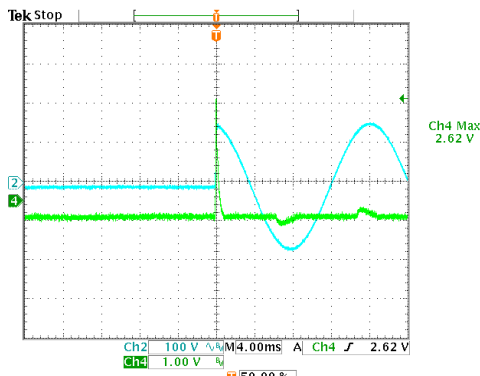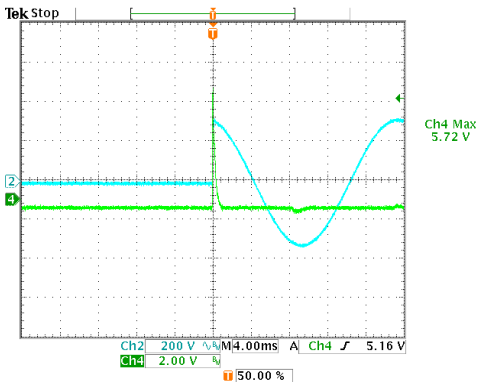

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105% ~ 260%	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P: TESTING TA: 25°C	223% 305VAC 223% 230VAC 205% 100VAC Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	15.75V ~ 20.30V	I/P: 305VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD TA: 25°C	17.50V 305VAC 17.50V 230VAC 17.50V 85VAC Shut off o/p voltage, clamping by zener diode
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD TA: 25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated: 725V 0.4A	I/P: 308VAC VDS : O/P: (1)Full Load Turn on (2) Output Short (3)Full load continue TA: 25°C	VIN: 308VAC VDS: (1). 642.00V (2). 532.00V (3). 642.00V
2	Input Capacitor	C5 Rated: 3uf 450V	I/P: 308VAC O/P: (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change TA: 25°C	(1). 432.00V (2). 432.00V (3). 432.00V
3	Control IC	U1 Rated: 9.0V (max) -0.3V (min)	I/P: 308VAC O/P: (1)Full Load (2)Output Short Change (4)Low Line No Load Vo(min) TA: 25°C	(1). 6.56V (2). 6.12V (3). 6.12V (4). 6.56V
4	O/P Diode	D100 Rated: 80V 2.0A	I/P: 308VAC O/P: (1)Full Load Turn on (2) Output Short (3)Full load continue TA: 25°C	(1). 72.40V (2). 53.60V (3). 71.20V
5	Clamp Diode	D1 Rated: 1000V 1.0A	I/P: 308VAC O/P: (1)Full load continue TA: 25°C	(1). 614.00V

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.000KVAC /min	I/P-O/P: 3.300KVAC /min TA: 25°C	I/P-O/P: 0.38mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500VDC TA: 25°C/70%RH	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 230VAC /50HZ O/P: FULL LOAD TA: 25°C	PASS



2	CONDUCTION	EN55022 CLASS B	I/P: 230VAC /50HZ O/P: FULL LOAD / 50% LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N: 1KV	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A

■RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																							
1	TEMPERATURE RISE TEST	MODEL: IRM-03-12 1. ROOM AMBIENT BURN-IN: 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 21.9°C 2. HIGH AMBIENT BURN-IN: 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 68.2°C	<table border="1"> <thead> <tr> <th>NO.</th> <th>Position</th> <th>ROOM AMBIENT Ta</th> <th>21.9°C</th> <th>HIGH AMBIENT Ta: 68.2°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>C6</td><td></td><td>37.8°C</td><td>83.6°C</td></tr> <tr><td>2</td><td>R5</td><td></td><td>35.8°C</td><td>81.8°C</td></tr> <tr><td>3</td><td>R2</td><td></td><td>37.0°C</td><td>82.9°C</td></tr> <tr><td>4</td><td>T1</td><td></td><td>38.9°C</td><td>84.4°C</td></tr> <tr><td>5</td><td>C101</td><td></td><td>35.2°C</td><td>80.6°C</td></tr> <tr><td>6</td><td>D100</td><td></td><td>38.2°C</td><td>83.9°C</td></tr> <tr><td>7</td><td>U1</td><td></td><td>40.6°C</td><td>86.2°C</td></tr> <tr><td>8</td><td>D1</td><td></td><td>39.2°C</td><td>84.8°C</td></tr> <tr><td>9</td><td>BD1</td><td></td><td>38.2°C</td><td>83.8°C</td></tr> <tr><td>10</td><td>CASE</td><td></td><td>37.1°C</td><td>82.1°C</td></tr> </tbody> </table>	NO.	Position	ROOM AMBIENT Ta	21.9°C	HIGH AMBIENT Ta: 68.2°C	1	C6		37.8°C	83.6°C	2	R5		35.8°C	81.8°C	3	R2		37.0°C	82.9°C	4	T1		38.9°C	84.4°C	5	C101		35.2°C	80.6°C	6	D100		38.2°C	83.9°C	7	U1		40.6°C	86.2°C	8	D1		39.2°C	84.8°C	9	BD1		38.2°C	83.8°C	10	CASE		37.1°C	82.1°C	
NO.	Position	ROOM AMBIENT Ta	21.9°C	HIGH AMBIENT Ta: 68.2°C																																																							
1	C6		37.8°C	83.6°C																																																							
2	R5		35.8°C	81.8°C																																																							
3	R2		37.0°C	82.9°C																																																							
4	T1		38.9°C	84.4°C																																																							
5	C101		35.2°C	80.6°C																																																							
6	D100		38.2°C	83.9°C																																																							
7	U1		40.6°C	86.2°C																																																							
8	D1		39.2°C	84.8°C																																																							
9	BD1		38.2°C	83.8°C																																																							
10	CASE		37.1°C	82.1°C																																																							
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230VAC O/P: 136% LOAD Ta: 25°C	TEST: OK																																																							
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 305VAC / 100VAC O/P: FULL LOAD Ta: -30.0°C	TEST: OK																																																							
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 70°C NO DAMAGE	I/P: 315VAC O/P: FULL LOAD Ta: 70°C HUMIDITY= 95.0% RH	TEST: OK																																																							
5	TEMPERATURE COEFFICIENT	±0.03% /(0°C~50°C)	I/P: 230VAC O/P: FULL LOAD	±0.0036% /(0°C~50°C)																																																							
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -40°C ~ +100°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: STATIC		TEST: OK																																																							
7	THERMAL SHOCK TEST	1. Thermal shock Temperature: -35°C ~ +75°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 10 CYCLE 5. Input/Output condition: 230VAC Full Load AC ON/OFF test turn on 58sec; turn off 2sec		TEST: OK																																																							
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (4) Acceleration: 5G (5) Test Time: 60 min in each axis (X.Y.Z) (6) Ta: 25°C		TEST: OK																																																							



9	CAPACITOR LIFE CYCLE	:SUPPOSE C101 IS THE MOST CRITICAL COMPONENT						
		(1) I/P: 230VAC	O/P : FULL LOAD	Ta= 25.0°C	LIFE TIME	(1).	158118	HRS
		(2) I/P: 230VAC	O/P : FULL LOAD	Ta= 70.0°C	LIFE TIME	(2).	70605.6	HRS
		(3) I/P: 230VAC	O/P : 75% LOAD	Ta= 70.0°C	LIFE TIME	(3).	88914	HRS
		(4) I/P: 230VAC	O/P : 50% LOAD	Ta= 70.0°C	LIFE TIME	(4).	125618.4	HRS
10	MTBF	10762.8K hrs min. Telcordia SR-332 (Bellcore) ; 2137.6K hrs min. MIL-HDBK-217F (25°C)						
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 70°C O/P: FULL LOAD						

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A50-S014