



# 中国国家强制性产品认证证书

证书编号：2024010907603972

认证委托人名称及地址  
苏州明纬科技有限公司  
苏州市相城区黄埭镇长平路 269 号

生产者名称及地址  
明纬企业股份有限公司  
新北市五股区五权三路 28 号

生产企业名称及地址  
苏州明纬科技有限公司  
苏州市相城区黄埭镇长平路 269 号

产品名称和系列、型号、规格  
开关电源

见附页（仅适用于海拔 5000 米及以下和非热带气候条件；不带电线组件销售）（本产品不带辅助散热风扇一起销售，规格书中有说明带风扇散热条件，需要搭配 Min. 23CFM 风量的风扇，安装示意图见附页）

## 产品标准和技术要求

GB 17625.1-2022 (A 类); GB 4943.1-2022; GB/T 9254.1-2021 (A 级)

上述产品符合《强制性产品认证实施规则 电子产品及安全附件》  
(CNCA-C09-01:2023) 的要求，特发此证。

发证日期：2024 年 01 月 26 日 有效期至：2029 年 01 月 25 日

证书信息和有效性可扫描下方二维码或登录发证机构网站查验，  
也可在认监委网站 ([www.cnca.gov.cn](http://www.cnca.gov.cn)) 查询。

经中国合格评定国家认可委员会认可 CNAS C001-P



签发：

谢肇煦



中国质量认证中心  
CHINA QUALITY CERTIFICATION CENTRE



中国质量认证中心





# 中国国家强制性产品认证证书

证书编号：2024010907603972

证书附页：第 1 页 共 2 页

型号：LOP-400-y, LOP-500-y, LOP-600-y(y=12,15,18,24,27,36,48,54,y 表示输出电压，影响安全和 EMC 性能)

规格：

| 型号         | 输入                                  | 输出参数  |          |           |
|------------|-------------------------------------|-------|----------|-----------|
|            |                                     | 电压    | 电流 (带风扇) | 电流 (不带风扇) |
| LOP-400-12 | 115-240Vac,<br>4.8-2.1A,<br>50/60Hz | 12Vdc | 33.3A    | 20.8A     |
| LOP-400-15 |                                     | 15Vdc | 26.7A    | 16.7A     |
| LOP-400-18 |                                     | 18Vdc | 22.2A    | 13.9A     |
| LOP-400-24 |                                     | 24Vdc | 16.7A    | 10.5A     |
| LOP-400-27 |                                     | 27Vdc | 14.9A    | 9.3A      |
| LOP-400-36 |                                     | 36Vdc | 11.2A    | 7.1A      |
| LOP-400-48 |                                     | 48Vdc | 8.4A     | 5.3A      |
| LOP-400-54 |                                     | 54Vdc | 7.5A     | 4.75A     |
| LOP-500-12 | 115-240Vac,<br>5.8-2.9A,<br>50/60Hz | 12Vdc | 41.6A    | 25A       |
| LOP-500-15 |                                     | 15Vdc | 33.3A    | 20A       |
| LOP-500-18 |                                     | 18Vdc | 27.8 A   | 16.7 A    |
| LOP-500-24 |                                     | 24Vdc | 20.9 A   | 13.4 A    |
| LOP-500-27 |                                     | 27Vdc | 18.5 A   | 11.9 A    |
| LOP-500-36 |                                     | 36Vdc | 13.9 A   | 8.9 A     |
| LOP-500-48 |                                     | 48Vdc | 10.4 A   | 6.7 A     |
| LOP-500-54 |                                     | 54Vdc | 9.3 A    | 6 A       |
| LOP-600-12 | 115-240Vac,<br>6.4-3.2A,<br>50/60Hz | 12Vdc | 50 A     | 30 A      |
| LOP-600-15 |                                     | 15Vdc | 40 A     | 24 A      |
| LOP-600-18 |                                     | 18Vdc | 33.3 A   | 20 A      |
| LOP-600-24 |                                     | 24Vdc | 25 A     | 16.7 A    |
| LOP-600-27 |                                     | 27Vdc | 22.3 A   | 14.8 A    |
| LOP-600-36 |                                     | 36Vdc | 16.7 A   | 11.1 A    |
| LOP-600-48 |                                     | 48Vdc | 12.5 A   | 8.3 A     |

本页为证书附页，应与证书主页同时使用。



中国质量认证中心  
CHINA QUALITY CERTIFICATION CENTRE

中国质量认证中心






# 中国国家强制性产品认证证书

证书编号：2024010907603972

证书附页：第 2 页 共 2 页

|            |  |       |        |       |
|------------|--|-------|--------|-------|
| LOP-600-54 |  | 54Vdc | 11.2 A | 7.4 A |
|------------|--|-------|--------|-------|

本产品带辅助散热风扇一起销售风扇辅助散热情况，需要搭配 Min.23CFM 风量的风扇，安装位置示意图如下：

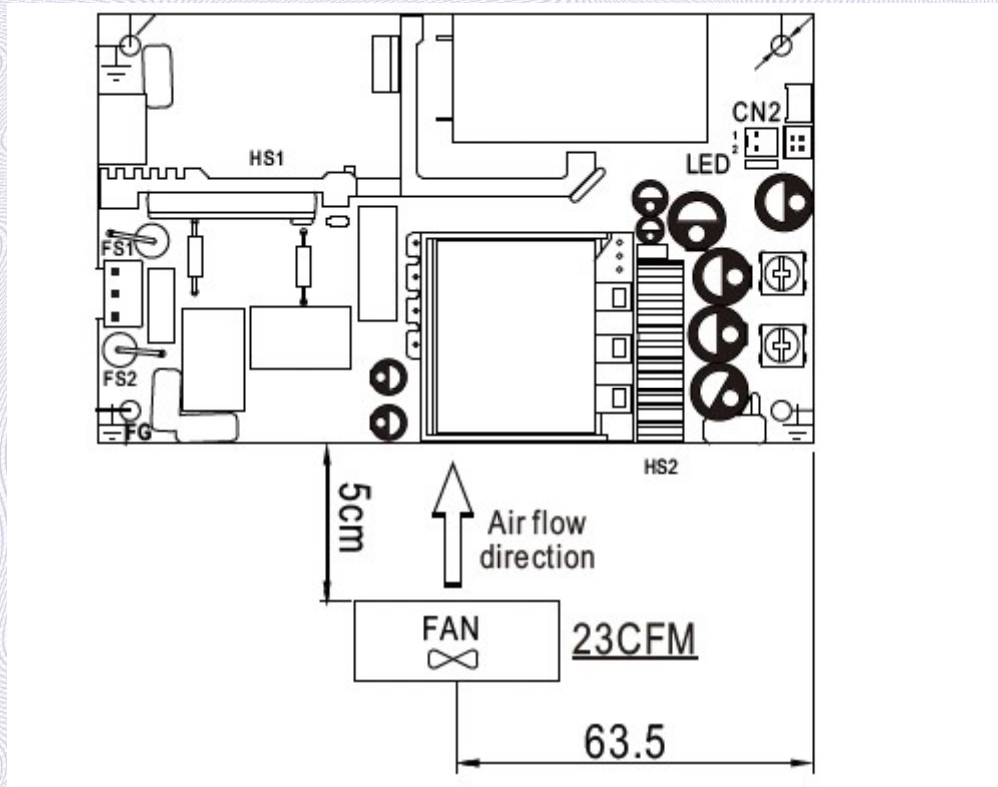

本页为证书附页，应与证书主页同时使用。



中国质量认证中心  
CHINA QUALITY CERTIFICATION CENTRE

中国质量认证中心





# CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

本翻译文件不具有法律效力，  
不得单独使用  
This translated document  
does not have legal validity and  
cannot be used in isolation

**CERTIFICATE NO.:** 2024010907603972

**NAME AND ADDRESS OF THE APPLICANT**

SUZHOU MEAN WELL TECHNOLOGY CO., LTD.

No.269, Changping Road, Huangdai Town, Xiangcheng District, Suzhou, Jiangsu Province, China.

**NAME AND ADDRESS OF THE MANUFACTURER**

MEAN WELL ENTERPRISES CO. , LTD

NO.28 , Wuquan 3rd Road,Wugu District,New Taipei City, Taiwan,24891

**NAME AND LOCATION OF THE FACTORY**

SUZHOU MEAN WELL TECHNOLOGY CO., LTD.

No.269, Changping Road, Huangdai Town, Xiangcheng District, Suzhou, Jiangsu Province, China.

**PRODUCT NAME,MODEL AND SPECIFICATION**

SWITCHING POWER SUPPLY

See Appendix ( Altitude up to 5000m, Non tropioal climate ; Sales without cord sets ) ( Without auxiliary cooling fan sales, specifications have explained with fan cooling conditions, need to match Min.23CFM air fan, schematic diagram see Annex )

**STANDARDS AND TECHNICAL REQUIREMENTS FOR THE PRODUCTS**

GB 17625.1-2022(Class A);GB 4943.1-2022;GB/T 9254.1-2021(Class A)

This is to certify that the above mentioned product(s) complies with the requirements of implementation rules for compulsory certification(REFNO. CNCA-C09-01:2023).

**Valid from:** Jan.26,2024

**Valid until:** Jan.25,2029

The certificate information and validity could be checked by scanning the QR code below or logging in to the website of the issuing authority, or on the website of the CNCA (www.cnca.gov.cn).

Accredited by China National Accreditation Service for Conformity Assessment CNAS C001-P



SIGNATURE:

谢肇煦



中国质量认证中心  
CHINA QUALITY CERTIFICATION CENTRE



CHINA QUALITY CERTIFICATION CENTRE



# CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

本翻译文件不具有法律效力，  
不得单独使用  
This translated document  
does not have legal validity and  
cannot be used in isolation

CERTIFICATE NO. : 2024010907603972

Appendix : Page 1 of 2

型号：LOP-400-y, LOP-500-y, LOP-600-y(y=12,15,18,24,27,36,48,54,y 表示输出  
电压，影响安全和 EMC 性能)

规格：

| 型号         | 输入                                  | 输出参数  |         |          |
|------------|-------------------------------------|-------|---------|----------|
|            |                                     | 电压    | 电流（带风扇） | 电流（不带风扇） |
| LOP-400-12 | 115-240Vac,<br>4.8-2.1A,<br>50/60Hz | 12Vdc | 33.3A   | 20.8A    |
| LOP-400-15 |                                     | 15Vdc | 26.7A   | 16.7A    |
| LOP-400-18 |                                     | 18Vdc | 22.2A   | 13.9A    |
| LOP-400-24 |                                     | 24Vdc | 16.7A   | 10.5A    |
| LOP-400-27 |                                     | 27Vdc | 14.9A   | 9.3A     |
| LOP-400-36 |                                     | 36Vdc | 11.2A   | 7.1A     |
| LOP-400-48 |                                     | 48Vdc | 8.4A    | 5.3A     |
| LOP-400-54 |                                     | 54Vdc | 7.5A    | 4.75A    |
| LOP-500-12 | 115-240Vac,<br>5.8-2.9A,<br>50/60Hz | 12Vdc | 41.6A   | 25A      |
| LOP-500-15 |                                     | 15Vdc | 33.3A   | 20A      |
| LOP-500-18 |                                     | 18Vdc | 27.8 A  | 16.7 A   |
| LOP-500-24 |                                     | 24Vdc | 20.9 A  | 13.4 A   |
| LOP-500-27 |                                     | 27Vdc | 18.5 A  | 11.9 A   |
| LOP-500-36 |                                     | 36Vdc | 13.9 A  | 8.9 A    |
| LOP-500-48 |                                     | 48Vdc | 10.4 A  | 6.7 A    |
| LOP-500-54 |                                     | 54Vdc | 9.3 A   | 6 A      |
| LOP-600-12 | 115-240Vac,<br>6.4-3.2A,<br>50/60Hz | 12Vdc | 50 A    | 30 A     |
| LOP-600-15 |                                     | 15Vdc | 40 A    | 24 A     |
| LOP-600-18 |                                     | 18Vdc | 33.3 A  | 20 A     |
| LOP-600-24 |                                     | 24Vdc | 25 A    | 16.7 A   |
| LOP-600-27 |                                     | 27Vdc | 22.3 A  | 14.8 A   |
| LOP-600-36 |                                     | 36Vdc | 16.7 A  | 11.1 A   |
| LOP-600-48 |                                     | 48Vdc | 12.5 A  | 8.3 A    |

This page is attached to the certificate and should be used at the same time as the certificate page.



中国质量认证中心  
CHINA QUALITY CERTIFICATION CENTRE

CHINA QUALITY CERTIFICATION CENTRE



# CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION


本翻译文件不具有法律效力，  
不得单独使用  
This translated document  
does not have legal validity and  
cannot be used in isolation

CERTIFICATE NO. : 2024010907603972

Appendix : Page 2 of 2

|            |  |       |        |       |
|------------|--|-------|--------|-------|
| LOP-600-54 |  | 54Vdc | 11.2 A | 7.4 A |
|------------|--|-------|--------|-------|

本产品带辅助散热风扇一起销售风扇辅助散热情况，需要搭配 Min.23CFM 风量的风扇，安装位置示意图如下：

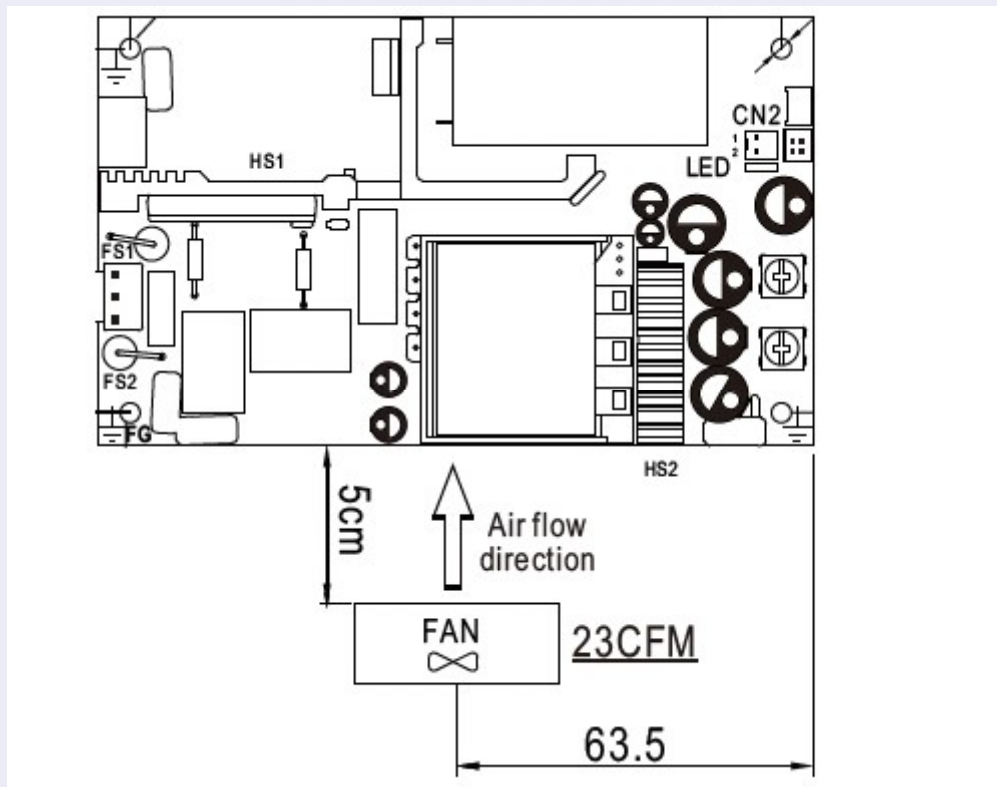

This page is attached to the certificate and should be used at the same time as the certificate page.



中国质量认证中心  
CHINA QUALITY CERTIFICATION CENTRE

CHINA QUALITY CERTIFICATION CENTRE